

DS-8325G1SL-TL
25 W Network Horn Speaker



- 110dB Nominal Sensitivity
- 124dB@1m Rated Maximum SPL
- 300Hz~8kHz bandwidth
- Support SIP
- 25W Rated Power

▪ Specification


Model		DS-QAZ1325G1T(C)
Microphone	Type	electret
	Amount	2
	Frequency Response	100 Hz to 20 kHz
	Sensitivity	-42 dBV/Pa
	Sampling Rate	48 kHz
	Quantization Bits	16 bit
Speaker	Rated Power	25 W
	Impedance	8 Ω
	Sensitivity(1 m, 1 W)	110 dB
	Max. Acoustic Pressure	124 dBSPL
	Direction	70° horizontal by 100° vertical
	Frequency Response	300 Hz to 8 kHz
	SNR	83 dB
Function	Audio Algorithm	AEC、AGC、ANS、DRC
	Audio Bit Rate	G.711ulaw(64 Kbps)/G.711alaw(64 Kbps)/MP3(128 Kbps)
	Audio File Format	MP3, WAV
	NTP Timing	Support
	Broadcast	Regular broadcast, live broadcast, emergency broadcast
	Two-Way Audio	Support
	Speech Synthesis	English
Network	Network Protocol	IPv4, HTTP, HTTPS, SIP, SSL/TLS, DNS, NTP, TCP, UDP, IGMP, ICMP, DHCP, ARP, SSH
	Interface Protocol (API)	ISAPI, ISUP, SIP, RTP
	Client	Hik-Connect, ivms/4200, HikCentral Professional, Hik-Partner Pro, NVR, MileStone
Communication	Communication Method	Support wired network communication
Interface	Ethernet Interface	RJ45 10 M/100 M Adaptive Ethernet port × 1
	Alarm	Alarm input ×1
	Power Output	12 VDC, 25 mA(max.)
	Local Storage	Built-in 4 GB EMMC (Audio file storage is 1 GB.)

	API	ISAPI, ISUP
	Reset	Support
General	Material	Metal
	Operating Temperature	-30 °C to 60 °C(-22 °F to 140 °F)
	Operating Humidity	< 90% (No condensation)
	Language	5 languages: English, French, Spanish, German, Italian
	Dimension	182mm × 275 mm × 239 m
	Power	24 VDC , 1167mA , 28W
	Package Dimension	310 mm × 245 mm × 400 mm(12.2" × 9.6" × 15.6")
	Weight	Approx. 2.1 kg (4.63 lb.)
	With Package Weight	Approx. 3.4 kg (7.50 lb.)
	Color	White
	Packing List	Device × 1 Threading cap × 1 Regulatory Compliance and Safety Information × 1
Approval	Protection	IP67
	EMC	CE-EMC: EN 55032:2015+A11:2020+A1:2020, EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019+A2:2021, EN 55035:2017+A11:2020 RCM: AS/NZS CISPR 32: 2015 IC: ICES-003: Issue 7
	Safety	CB: IEC 62368-1:2014 CE-LVD: EN 62368-1:2014/A11:2017
	Environment	CE-RoHS: 2011/65/EU WEEE: 2012/19/EU Reach: Regulation (EC) No 1907/2006

▪ Available Model

DS-8325G1SL-TL

▪ Dimension

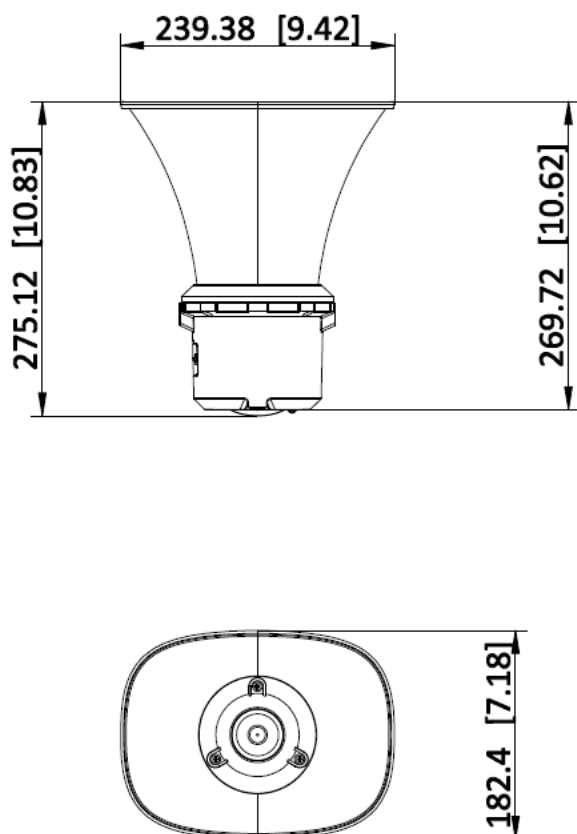

Unit: mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com

